

# VC200, Smart Video Conferencing Endpoint

## Ideal for Small and Huddle Room

VC200 is an entry-level smart video conferencing endpoint launched by Yealink. With Ultra HD 4K camera, 103° super-wide angle lens and 6 beamforming microphone arrays for direct voice pickup and noise proof, VC200 brings ultimate audio & video experience. 6-in-1 design which integrates codec/camera/microphone/bracket/Wi-Fi/Bluetooth, wireless presentation supported, and two-cable-deployment, Yealink VC200 integrates everything you need for small and huddle rooms.




## Ultra HD 4K Camera and Super-wide Angle Lens

- The Ultra HD 4K camera supports 4x digital zoom and e-PTZ, with super-wide 103° horizontal field of view, covering every seat at the table.
- 1080P full HD video conferencing and H.265/HEVC codecs, resisting up to 30% video loss.



Ultra HD 4K  
Camera

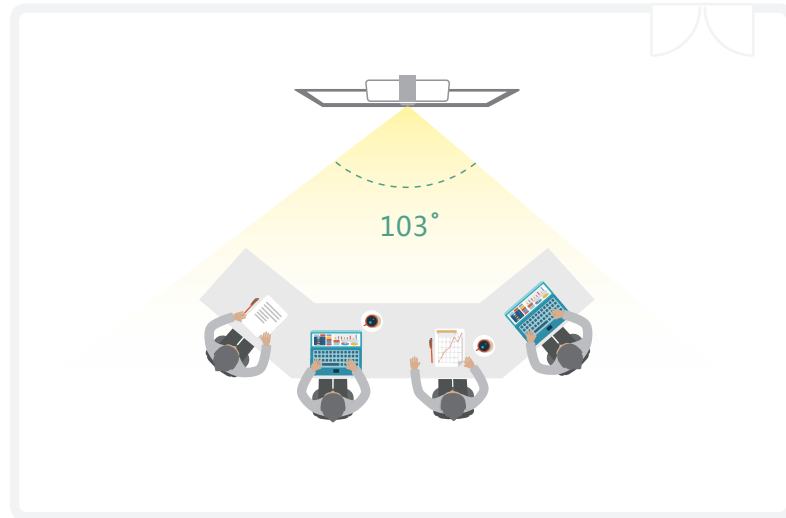


## Clearer Voice with 6 Beamforming Microphone Arrays

- With the most advanced Beamforming technology, VC200's 6 built-in microphone arrays support directed voice pickup, ensuring a clearer voice by automatically identifying and comparison voice.
- Automatically filtering unrelated noise, thanks to Yealink's Smart Noise Proof technology, video conferencing can be more concentrated.



## Compact Design, 1 Minute Deployment



- With all-in-one design by integrating codec, camera, microphone and bracket, VC200 can easily fit TV ranging from 6mm to 50mm thick.
- VC200 supports PoE supply, connect network and HDMI cables and you are ready for a video conference.
- Based on Android OS and TV-styled interactive user interface, VC200 provides all functions with one-touch operation. What you see is what you get, no training cost.

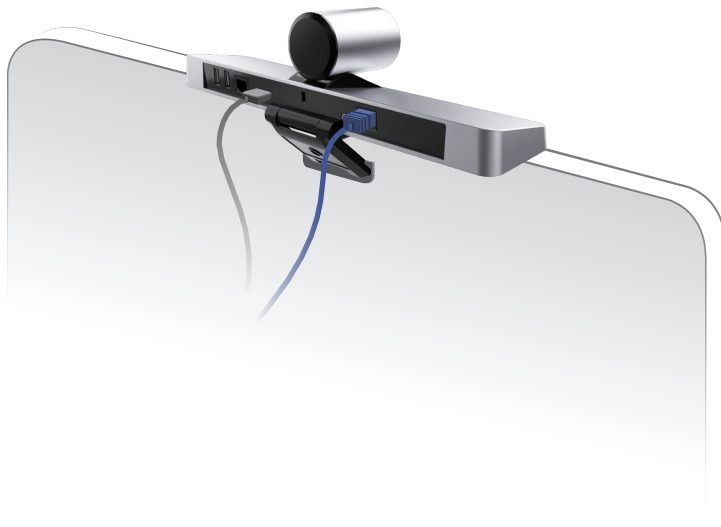

Android OS

## Wireless Application, Clutter-free Meeting Room

- Easily connect the VC200 through Bluetooth or Wi-Fi, you can utilize wireless application including one-click wireless content sharing. No installation nor messy cables, VC200 greatly saves your effort of deployment.
- With optional wireless microphones, VC200 can extend the range of sound pickup.

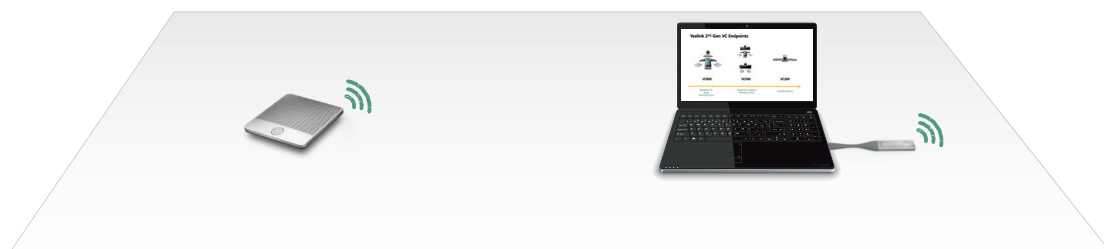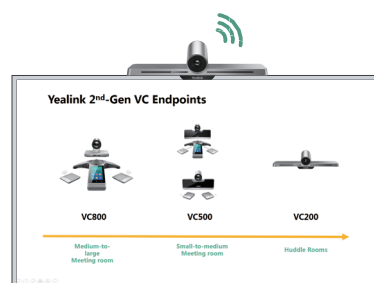

## VC200 Endpoint Specification

| Module               | Features  | VC200                                   |
|----------------------|---|---|
| Camera Features      | Pixel   | 8M Pixels                               |
|                      | Zoom  | 4X digital                              |
|                      | Frame rate  | 30 FPS                                  |
|                      | Horizontal field of view                                    | 103°                                    |
| Video Features       | Video call quality  | up to 1080P30FPS                        |
|                      | Bandwidth requirement                                       | 1080P from 512kbps in H.265             |
|                      | Video packet Loss recovery                                  | 30%                                     |
|                      | Local HD recording  | ✓ (USB flash drive or local storage)    |
| Microphone           | Microphone  | 6 built-in beamforming microphone array |
|                      | Voice pickup distance                                       | 16ft / 5 meters                         |
|                      | Wireless microphones  | Optional                                |
|                      | Noise proof technology                                      | ✓                                       |
| Network & Security   | Wi-Fi   | 2.4GHz/5GHz dual mode                   |
|                      | Bluetooth   | Bluetooth 4.2                           |
|                      | TCP/IP  | IPv4 & IPv6                             |
|                      | Communication protocols                                     | H.323 / SIP                             |
|                      | Traversal features  | ICE/TURN/STUN/NAT/H.460                 |
|                      | Encryption  | SRTP/TLS/H.235/AES 128-bit              |
| Physical Connections | Video output  | 1 x HDMI                                |
|                      | Video input for content                                     | Optional WPP20 or VCH50                 |
|                      | Line-in   | X                                       |
|                      | Line-out  | 3.5mm                                   |
|                      | USB interface   | 2 x USB2.0                              |
|                      | Network interface   | 1 x 10/100 Ethernet                     |
|                      | PoE   | ✓                                       |
| Video Codec          | H.265, H.264 High Profile, H.264, H.263                     |   |
| Audio Codec          | Opus (8-48kHz), G.722.1C, G.722.1, G.722, G.711 (PCMU/PCMA) |   |
| Video Resolution     | 1080P, 720P, 540P, 360P, 4CIF, CIF                          |   |



Contact us for more information or a consultation

TheMaynardGroup.com  
800.377.3150